

DC 7.5-10 TON PACKAGED

Options for Custom Designs & Modifications

Hot Gas By-Pass
Low Pressure By-Pass
Flooded Condenser With Receiver & Accumulator
Evaporator Heat Tape
Freeze Protection
Dual Pump
High Pressure Pump

Construction Features

Environmentally Friendly R-410A
Top Discharge Condenser Exhaust
Air Intake From Either Side for Easy Placement
Washable Condenser Filters
Easy Access Electrical Panel
Insulated Copper Piping
Stainless Steel Heat Exchanger
Compressor Crankcase Heater
G-90 Galvanized Cabinet
All Weather-Tight Components
Non-Corroding Insulated Water Tank
Water Level Viewing Ports
Water Tank Capacity of 60 Gallons
Stainless Steel Pump with Ball Valve
24 Volt Digital Temperature Control Module with On/Off Switch

Safety Features


ETL Listed
Low Ambient Fan Cycling
Low Pressure Refrigeration Control
High Pressure Refrigeration Control
Low Water Flow Safety Shut-Off
Short Cycling Time Delay
Temperature Sensor Failure Protection
Water Inline Strainer

ELECTRICAL SPECIFICATIONS: DC 7.5-10 TON PACKAGED

P/N	MODELS	TONS	VOLTS	HERTZ	PH	MIN CIRCUIT AMP	MAX FUSE	COMPRESSOR RLA	LRA	PUMP HP
002733	WCDCP7.523	7.5	208/230	60	3	52.4	80	29.5	195	1
004216	WCDCP7.543	7.5	460	60	3	24.2	35	14.7	95	1
002682	WCDCP1023	10	208/230	60	3	57.1	90	33.3	239	1
002232	WCDCP1043	10	460	60	3	28	45	17.9	125	1

Specifications subject to change without notice.

DIMENSIONS: DC 7.5-10 Ton Packaged

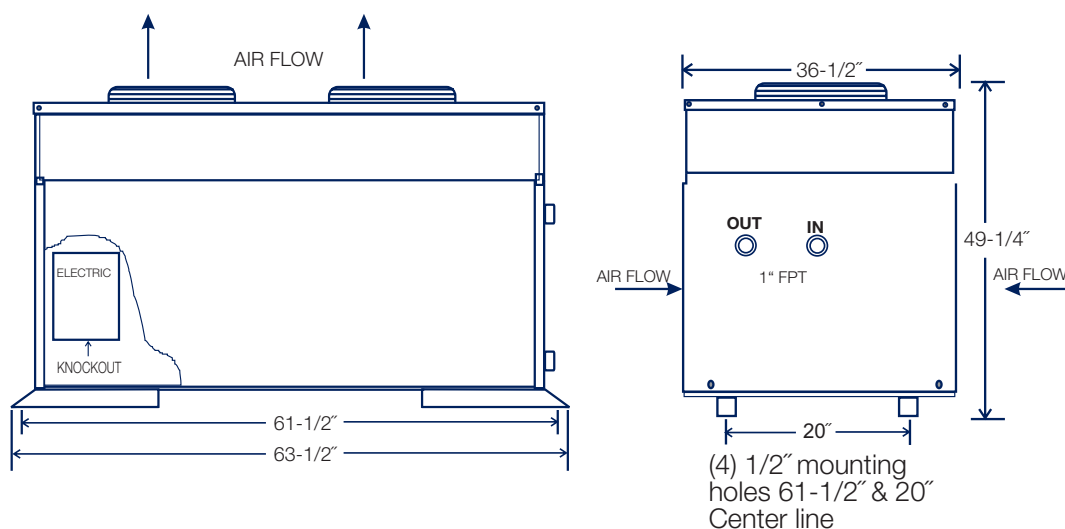

FLOW DIAGRAM: DC 7.5-10 Ton Packaged Chiller With OPTIONAL DUAL Pumps

